



P1: M-942A

P2: M-971C

Customer No: No.1

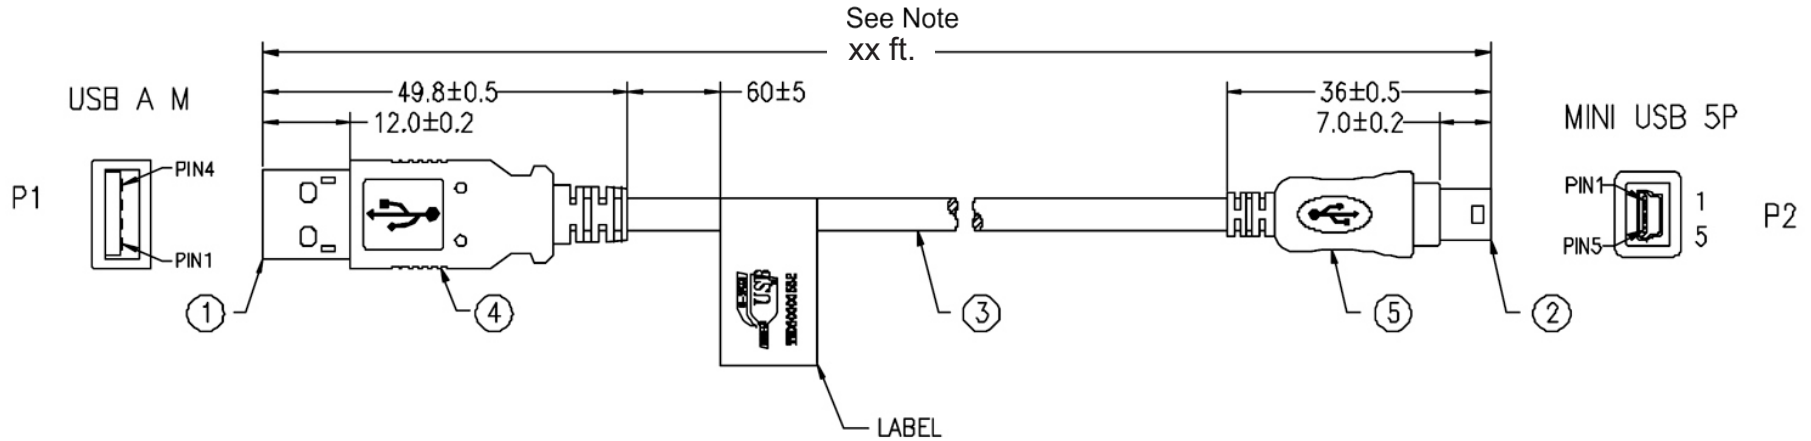

Note: Available in Lengths:
1FT, 3FT, 6FT, 10FT, 15FT

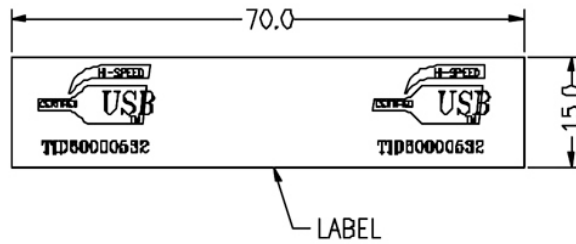

PIN ASSIGNMENT			
P1		P2	
1	—————	1	RED 24#
2	~~~~~	2	WHITE
3	~~~~~	3	GREEN
4	—————	5	BLACK 24#
SHIELD	—————	SHIELD	

NOTE: All relevant materials are complied with RoHS directive .

5	BLACK HEAT SHRINK TUBE $\phi 1.0 \times 5\text{mm}$	4	M743
	MOLDED PVC BLACK		M304
4	MOLDED PVC BLACK		M304
3	USB 2.0 CABLE, UL STYLE 1 TWISDED PAIR 2BAWG AND 2C 24AWG,OD 4.5mm, AMA BRAID, JACKET BLACK, DRAWING No. EJAB2801P2402C-139	1810mm	M304
2	MINI USB 5P MALE 2.0, GOLD PLATING 30u" ON CONTACTS, BLACK INSULATOR	1	M108
1	USB A MALE 2.0, GOLD PLATING 30u" ON CONTACTS, WHITE INSULATOR, SHORT A PERCE TYPE	1	M108
No.	DESCRIPTION	Q'TY	Supplier
APPROVED		PCCABLES.COM INC	
CHECKED	HU		
DRAWING	LI		
DATE	12/DEC/08		
	ITEM NO.		
		UNIT:mm	

Cable Length Unless Other Spec.
Tolerances:
0 ~200mm ±10mm
201~1000mm ±20mm
1001 ~1500mm ±25mm
1501~2100mm ±30mm
2100mm± ±40mm

CHECKED